

Port side
Lightning Surge **10kV**
Tolerance

50°C Capable

Suitable with Network Camera
and Wireless AP!

- IEEE802.3at (30W/Port)
- All Giga + 2 SFP Slot

Switch-M8eGLPWR+

(PN28088)



SFP

Max.
Power Supply
124w

Robust Lightning Surge Tolerance



Tolerance of AC line and each port is 10kV.


① AC line
Level X
10kV

② Each port
Special
Each port
10kV

Port side

IEC61000-4-5 試験レベル 基準値	基準値
Level 4	4kV
Level 3	2kV
Level 2	1kV
Level 1	0.5kV


SPD (Surge Protector Device) equipped in all port.
Bypass the Induced lightning surge through twisted-pair cable to the ground.
Because of this technology, lightning surge tolerance has been strengthened by 250% from conventional 4kV to 10kV.

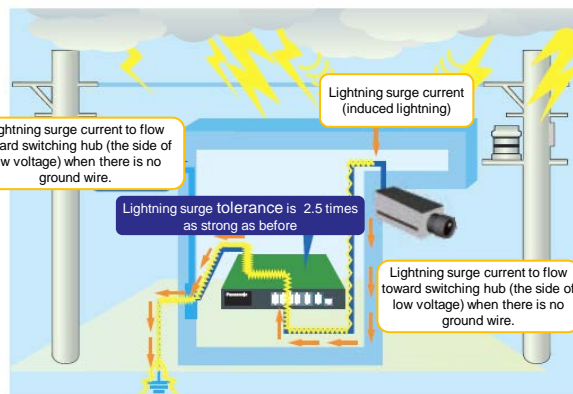

Notice:
• It does not mean that we guarantee the product is immune to malfunction.
• Strongly recommend to install lightning arresters on power unit, port side of switch and port side of power receiving unit.
• Repair fee due to lightning strike will be applicable even though the products is under warranty period.

Optical Port Monitoring (DDM)

You can immediately check the status of SFP module remotely by using network connection without special device such as optical power meter. Connection issue can be diagnosed **remotely**.




Prevent on site physical verification

No need of optical power meter

PoE Scheduler Function

PoE scheduler function allows user to define the period of individual port's power supply to connected device. This function also assists on preventing fraud use and power consumption on PoE devices such as IP-phone and wireless AP. User can program (month, week, day, specified day) to automatically turn off and on the power.

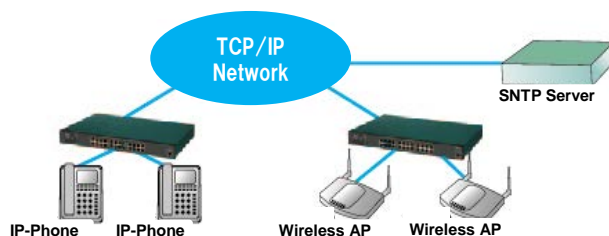

1. All port Gigabit Ethernet Capable

All ports provides Gigabit Ethernet connectivity
Small Form-Factor Pluggable (SFP) uplinks
(UTP and SFP ports are exclusive use only)

2. 802.3at Power over Ethernet Plus (PoE+)

PoE+ support for up to 30W per port
This series support both PoE and PoE+ that incorporate high-speed wireless access point.

3. Loop Detect/Shutdown & Loop History Function (simple ver.)

- Capable of detecting loop failure even when bridged in multiple switches.
- Automatic port shutdown and front panel LED notification.
- Loop History Function (simple ver.)
It provides information with Loop History LED which shows whether loop failure happened in the last three days.

4. Up to 50°C Operating Temperature


Supports **50 degree** Celsius operating temperature

5. Pursue Lower Energy-Consumption

- Automatically turn off port power when the port has been unplugged.
- It also supports **802.3az(LPI)** that reduce power consumption during the periods of low data activity.
- PoE Schedule Function
Capable of scheduling power supply to end devices.
- Automatically turn off power supply during the period of no data activity.

6. Others

Fan Sensor/ Temp. Sensor/ VLAN/ QoS/ IEEE802.1X/
IGMP Snooping/ Link Aggregation/ Redundant Ring Protocol/ STP/ RSTP

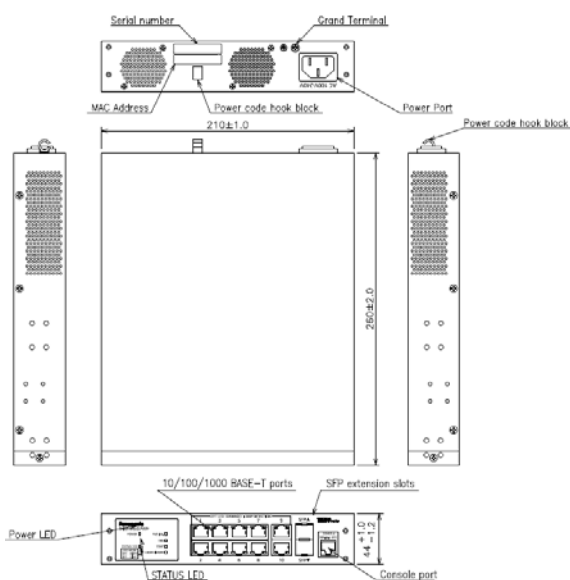

Product Name		Switch-M8eGLPWR+
Product Number		PN28088
Port Expansion Module Slot	10/100/1000BASE-T	10 ports
	SFP (Combo)	2 slots
PoE Port		8 ports (IEEE802.3at)
Cascade Connection		All UTP ports are MDI/MDI-X
Switching Method		Store and Forward
Switching Capacity		20.0Gbps
Forwarding Rate		1,488,000pps/port (1000Mbps) 148,800pps/port (100Mbps) 14,880pps/port (10Mbps)
Auto Negotiation		○ (It is possible to set transmission mode)
Mac Address Table		8K/Unit
Packet Buffer		512KB/Unit
Loop Prevention		Loop prevention, Loop Detection/Shutdown/History
Link Aggregation		○
Security		IEEE802.1x (port base)
QoS		IEEE802.1p, Scheduling : PQ/WRR
VLAN		IEEE802.1Q TagVLAN(256 Groups), Port Security Group Setting Function
Spanning Tree		IEEE802.1D, IEEE802.1w
Multicast		IGMP Snooping
Ring Protocol		○
PoE Scheduler		○
Management		SNMP v1/ v2c, RMON, SSHv2, Telnet Server, Web Server
Power Unit		AC100-240V 50/60Hz
Power Consumption	Max	166W
	Min	16.8W
Max Power Supplying Ability	Per Port	30W
	Whole Device	124W
Operating Environment		Temperature : 0°C~50°C, Humidity : 20~80%
Storage Environment		Temperature : -20°C~70°C, Humidity : 10~90%
Size (mm)		H44 × W210 × D280
Accessories		Manual, CD-ROM, Power Code, Rubber Foot

eGLPWR+ Series

Switch-M5eGLPWR+	Switch-M8eGLPWR+	Switch-M12eGLPWR+	Switch-M16eGLPWR+	Switch-M24eGLPWR+
PN28058	PN28088	PN28128	PN28168	PN28248
Max. Power Supply 62W	Max. Power Supply 124W	Max. Power Supply 185W	Max. Power Supply 185W	Max. Power Supply 185W

Website <http://panasonic.co.jp/es/pesnw/english/index.html>

Panasonic Eco Solution Networks Co., Ltd.

2016.6.21